

MT 835 / MT 1135 / MT 1335

TELESCOPIC HANDLERS



 **MANITOU**

www.manitou.com

MT 835 / MT 1135 / MT 1335

Your choice of 3 models



MT 835

8 m / 3.5 T



MT 1135

11 m / 3.5 T
with/without
stabilizers



MT 1335

13 m / 3.5 T





MANITOU YOUR PARTNER FOR ALL YOUR HANDLING SOLUTIONS FOR OVER 50 YEARS...

MANITOU, your partner for your needs for more than 50 years **whatever your application.**

The new telescopic forklifts represent a complete revolution in methods of lifting between 8 and 13 metres, and offer high performance lifting and loading capability:

- Standard design benefits for ease of use and maintenance
- Compact machines, maximum lift capacity
- Choice of transmission - torque convertor or hydrostatic
- Platform mode: Full range of MANITOU attachments

These forklifts are your allies in your quest for **productivity** and **simplicity.**

The **performance** and **manoeuvrability** of the new telescopic MANITOU forklift trucks let you carry out all your building and renovation tasks **quickly** and **in complete safety.**



SIMPLICITY

Simple OPERATION and MAINTENANCE

COMMONALITY whatever the model

Spacious and comfortable cabin




Ergonomic dashboard

- All the information you need: direction of travel, wheel alignment, boom angle, fuel level, hour meter etc.
- **Stability indicator** cutting off aggravating movements. You choose between a **handling or suspended load mode** in order to optimise your handling.

JSM® : everything in the palm of your hand



- Attachment function control
- Extension/retraction control for the boom
- Forward/backward/neutral movement selector switch

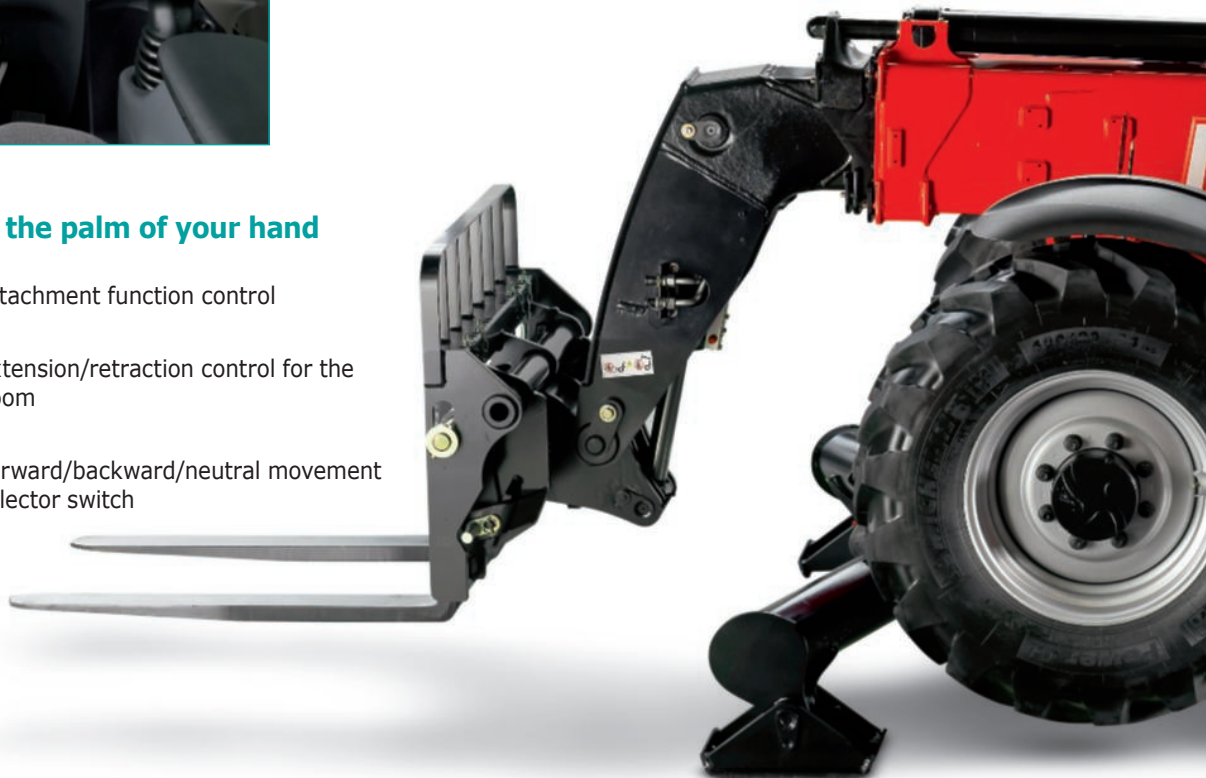

You can work with SIMPLICITY and in complete SAFETY



- Baskets capacity **up to 1000 kg** with **automatic locking of the rear axle**. (MT 14/18 'A' Models only).
- **Automatic Parking Brake** next to the hill start assistance button.
- **EASY CONNECT SYSTEM** allowing the depressurisation of the hydraulic attachment line without turning off the engine.
- Adjustable **continuous flow of hydraulics** to the auxiliary services.
- **Tilt lock** out facility for enhanced safety.
- **Digicode** as standard for security and immobilisation.
- **Radio control** (optional).



IDENTICAL MAINTENANCE whatever the model

- The engine, transmission, hydraulics, cab, frame - all are sourced from the same design.
- **2-sided opening of the engine compartment** - no need to undo any parts, thereby saving maintenance time.


FULL 360° DEGREE VISIBILITY



SAFE AND RAPID ACCESS

through a wide door with a single notched anti-slip step.

MAINTENANCE and DIAGNOSTICS for the machine shown on **multi-function screen** on the dashboard.

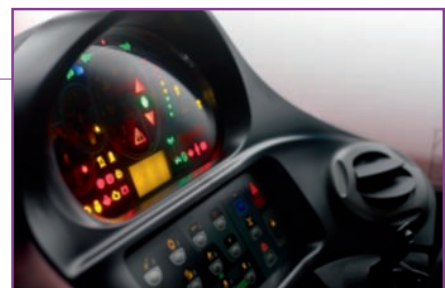

PRODUCTIVITY

PERFORMANCE and MAINTENANCE

102 HP

permanent four-wheel drive
New generation **STAGE 3B**
engine with particle filter.



According to your needs


hydrostatic transmission or **torque converter** (inching an optional extra) to respond to your working practice.

Permanent 4 wheel drive

Powerful braking applied on both axles.



Substantial ground clearance
41 cm



3 lifting heights

8 - 11 - 13 m

One nominal load capacity

3.5 T

Frame Levelling

(standard on MT 1135 and MT 1335) **+/- 10°**



Compact stabilizers

(MT 1135 and MT 1335)

which remain within the working width of the machine whatever their position.

Ultra-short turning radius

3.85 m



3 Steering modes



4 steering wheels for short turning spaces on restricted sites



2 front driving wheels to guarantee on-road safety



Crabwise movement for lateral approaches and delicate exits

Your MANITOU forklift, a **multi purpose** machine...

Thanks to the MANITOU **attachment system**, you can **easily and quickly fit numerous attachments to your forklift** - forks, buckets, mixers, jibs, platform...



...for a **multitude of applications**

Versatility of MANITOU forklifts answers all **your on-site needs**, making the most of your working time and productivity:

- placing of loads
- distribution of material in restricted space
- bulk loading at depots and on-site
- placing suspended loads
- lifting personnel...

LOAD PLACING				
Forks	Hook Jib	Lattice Jib	Extensible Lattice Jib	Winch

MATERIAL HANDLING		
Rehandling Bucket	4 in 1 Bucket	Construction Bucket

PLATFORMS	
Fixed Platform 365 kg	Extensible Platform 1000 kg

OTHERS	
Concrete Mixer Bucket	Concrete Bucket





Tailor-made finance to make the best use of your funds

You can plan the purchase of your forklift with peace of mind by using MANITOU^{*} financing opportunities.

You will have simple solutions adapted to your needs and seasonal requirements. If you want to make a rapid investment, consider asking us for a personalised proposal to take your situation into account.

* MANITOU Finance solutions are available in certain countries.

MANITOU maintenance contract

2 levels of maintenance adapted to your needs. You are sure of:

- equipment always in good working condition
- a reduction of repair costs as a result of regular servicing
- authentic standardised services

- Labour
- Attendance costs



- Labour
- Attendance costs
- Parts and lubricants



MANIPLUS extension of guarantee

With **MANIPLUS** you can take out an extension of guarantee of 12 or 24 months.

EASY MANAGER

A simple and flexible system for fleet management (with or without geolocation) to provide optimum service from your machines. **EASY MANAGER** gives you:

- real-time materials management
- simple and easy way of managing your machinery activity and maintenance.
- maximise your asset and safeguard your equipment




MANITOU spare parts

Utilising genuine MANITOU spare parts is sure to prolong the best performance capability of your machine. Your MANITOU dealer has access to a stock of 70,000 part numbers, available in 24 hours in Europe (48 hours outside Europe).






MT 835

	MT 835	MT 835 H
Lifting		
Max. capacity	3500 kg	
Max. lifting height	7.75 m	
Max. outreach	4.45 m	
Break-out force with bucket	6264 daN	
Unladen time		
Lifting	6.6 secs	
Lowering	6.0 secs	
Extension	6.0 secs	
Retraction	5.6 secs	
Crowd	3.2 secs	
Dump	3 secs	
Tyres	400/80-24	
Braking		
Service brake	Oil immersed multi-disc braking on front/rear axles	
Parking brake	Automatic Negative Handbrake	
Engine		
	PERKINS - STAGE 3B	
Type	854E-34TA	
Cubic capacity	3400 cm ³	
Power	102 HP/75 kW	
Max. torque	420 Nm - 1400 rpm	
Injection	direct	
Cooling	water	
Laden drawbar pull	8200 daN	6200 daN
Transmission		
	torque converter 4 wheel drive	hydrostatic 4 wheel drive
Reversing shift	electrohydraulic control	
Number of gears (forward/reverse)	4/4	3/2
Max. travel speed (may vary according to applicable regulations)	25 kph or 35 kph	
Steering mode	4 wheel steer - 3 Steering Modes	
		
Controls		
	JSM® Joystick multi - function Load Limiter Cut off system - EN15000 Norm	
Hydraulics		
Pump	gear type with priority valve 125 l/min - 270 bar	
Capacities		
Hydraulic oil	175 l	
Fuel	120 l	
Unladen weight (with forks)	7200 kg	7300 kg
Dimensions		
1. Front wheel centre to carriage	1.49 m	
2. Wheelbase	2.88 m	
3. Rear wheel centre to rear face	0.87 m	
4. Overall length to carriage	5.24 m	
5. Ground clearance	0.41 m	
6. Overall width of cab	0.88 m	
7. Inside tyre width	1.87 m	
8. Overall width	2.28 m	
9. Overall height	2.42 m	
Standard forks (length x width x thickness)	1200 x 125 x 45 mm	
Turning radius (over tyres)	3.85 m	
Carriage rotation (crowd/dump)	12° / 114°	
Noise and vibration		
Noise at driving position (LpA)	82 dB	
Environmental noise (LwA)	106 dB	
Vibration to whole hand/arm	<2.5 m/s ²	

Rough terrain load chart
standard EN1459 annex B

Machine on tyres with forks

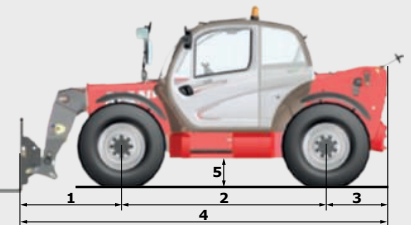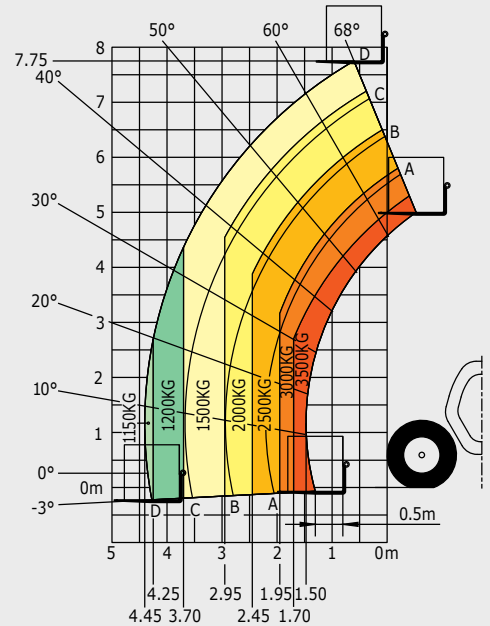



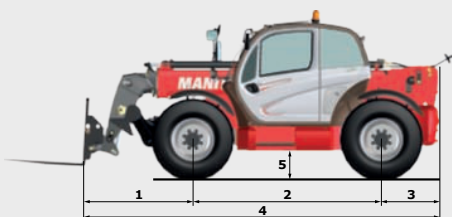
This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BP SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes



MT 1135

	MT 1135	MT 1135 H	MT 1135 HA
Lifting			
Max. capacity		3500 kg	
Max. lifting height		11.05 m	
Max. outreach		7.75 m	
Break-out force with bucket		6305 daN	
Unladen time			
Lifting		8.5 secs	
Lowering		7.0 secs	
Extension		13.0 secs	
Retraction		9.0 secs	
Crowd		3.0 secs	
Dump		3.0 secs	
Tyres		400/80-24	
Braking			
Service brake		Oil immersed multi-disc braking on front/rear axles	
Parking brake		Automatic Negative Handbrake	
Engine			
		PERKINS - STAGE 3B	
Type		854E-34TA	
Cubic capacity		3400 cm ³	
Power		102 HP/75 kW	
Max. torque		420 Nm - 1400 rpm	
Injection		direct	
Cooling		water	
Laden drawbar pull	9150 daN		7150 daN
	torque converter 4 wheel drive		hydrostatic 4 wheel drive
Transmission			
Reversing shift		electrohydraulic control	
Number of gears (forward/reverse)	4/4		3/2
Max. travel speed (may vary according to applicable regulations)		25 kph or 35 kph	
Steering mode		4 wheel steer - 3 Steering Modes	
			
Controls			
		JSM® Joystick multi - function Load Limiter Cut off system - EN15000 Norm	
Hydraulics			
Pump		gear type with priority valve 125 l/min - 270 bar	
Capacities			
Hydraulic oil		175 l	
Fuel		120 l	
Unladen weight (with forks)	8800 kg		8900 kg
Dimensions			
1. Front wheel centre to carriage		1.60 m	
2. Wheelbase		2.88 m	
3. Rear wheel centre to rear face		0.89 m	
4. Overall length to carriage		5.37 m	
5. Ground clearance		0.41 m	
6. Overall width of cab		0.88 m	
7. Inside tyre width		1.87 m	
8. Overall width		2.28 m	
9. Overall width (stabilizers lowered)		2.28 m	
10. Overall height		2.42 m	
Standard forks (length x width x thickness)		1200 x 125 x 45 mm	
Turning radius (over tyres)		3.85 m	
Frame levelling		+/- 10°	
Carriage rotation (crowd/dump)		16°/110°	
Noise and vibration			
Noise at driving position (LpA)		82 dB	
Environmental noise (LwA)		106 dB	
Vibration to whole hand/arm		<2.5 m/s ²	




MT1135


Rough terrain load chart

standard EN1459 annex B

Machine on tyres with forks

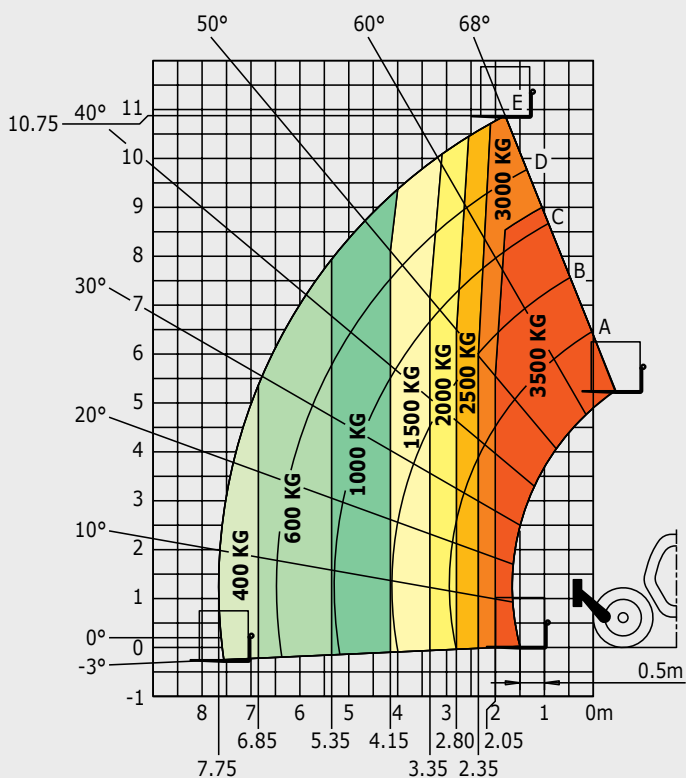


Machine on stabilizers with forks

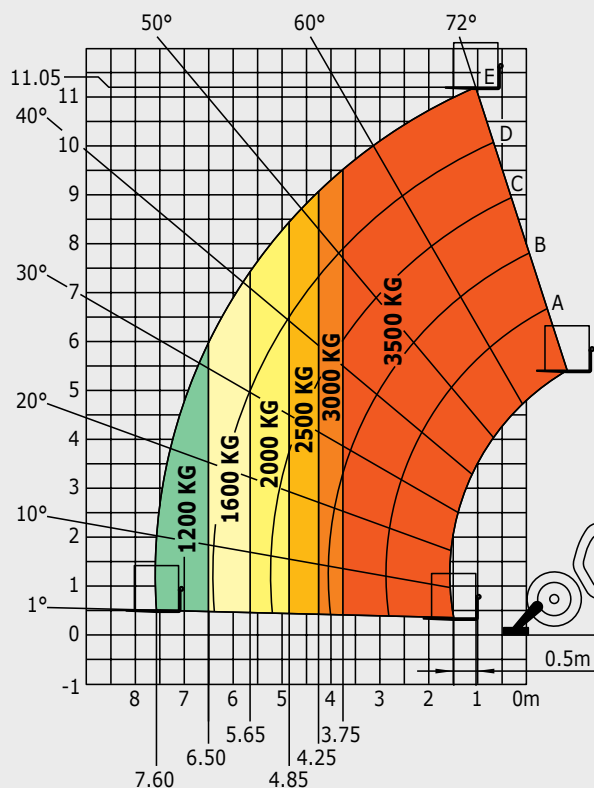

Machine on stabilizers with platform

(MT 1135 HA version)

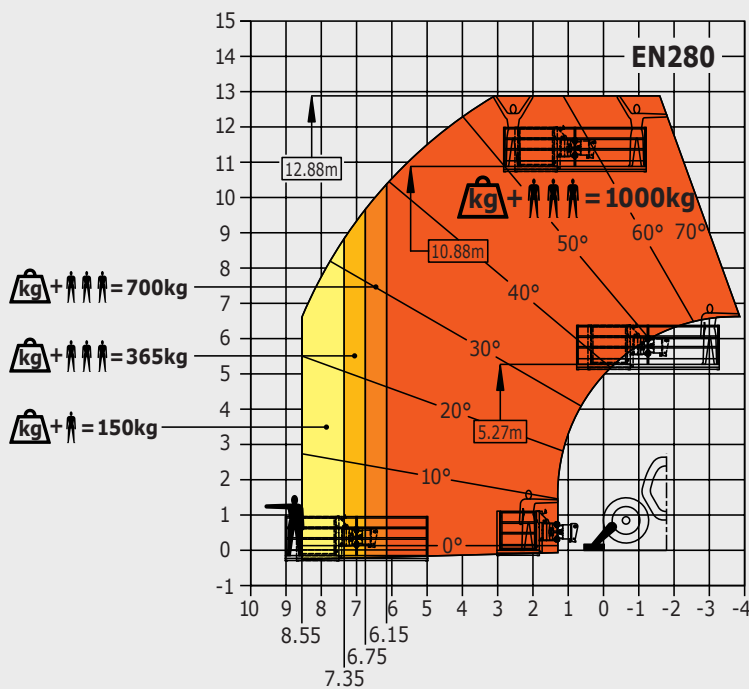




This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes



MT1335

	MT 1335	MT 1335 H	MT 1335 HA
Lifting			
Max. capacity		3500 kg	
Max. lifting height		12.55 m	
Max. outreach		8.75 m	
Break-out force with bucket		6400 daN	
Unladen time			
Lifting		9.8 secs	
Lowering		8.2 secs	
Extension		14.2 secs	
Retraction		9.7 secs	
Crowd		2.7 secs	
Dump		2.8 secs	
Tyres			
		400/80-24	
Braking			
Service brake		Oil immersed multi-disc braking on front/rear axles	
Parking brake		Automatic Negative Handbrake	
Engine			
		PERKINS - STAGE 3B	
Type		854E-34TA	
Cubic capacity		3400 cm ³	
Power		102 HP/75 kW	
Max. torque		420 Nm - 1400 rpm	
Injection		direct	
Cooling		water	
Laden drawbar pull	9800 daN		7800 daN
	torque converter 4 wheel drive		hydrostatic 4 wheel drive
Transmission			
Reversing shift		electrohydraulic control	
Number of gears (forward/reverse)	4/4		3/2
Max. travel speed (may vary according to applicable regulations)		25 kph or 35 kph	
Steering mode		4 wheel steer - 3 Steering Modes	
			
Controls			
		JSM® Joystick multi - function Load Limiter Cut off system - EN15000 Norm	
Hydraulics			
Pump		gear type with priority valve - 125 l/min - 270 bar	
Capacities			
Hydraulic oil		175 l	
Fuel		120 l	
Unladen weight (with forks)			
	8800 kg		8900 kg
Dimensions			
1. Front wheel centre to carriage		1.80 m	
2. Wheelbase		2.88 m	
3. Rear wheel centre to rear face		1.18 m	
4. Overall width of cab		0.88 m	
5. Ground clearance		0.41 m	
6. Overall length to carriage		5.86 m	
7. Inside tyre width		1.87 m	
8. Overall width		2.28 m	
9. Overall width (stabilizers lowered)		2.28 m	
10. Overall height		2.42 m	
Standard forks (length x width x thickness)		1200 x 125 x 45 mm	
Turning radius (over tyres)		3.85 m	
Frame levelling		+/- 10°	
Carriage rotation (crowd/dump)		12°/114°	
Noise and vibration			
Noise at driving position (LpA)		82 dB	
Environmental noise (LwA)		106 dB	
Vibration to whole hand/arm		<2.5 m/s ²	

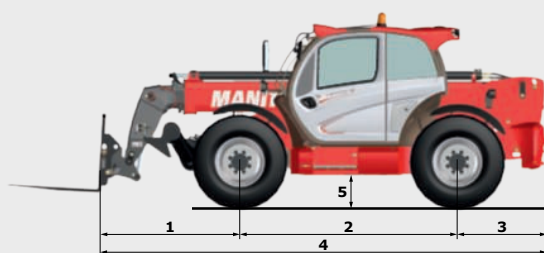


MT1335


Rough terrain load chart

standard EN1459 annex B

Machine on tyres with forks

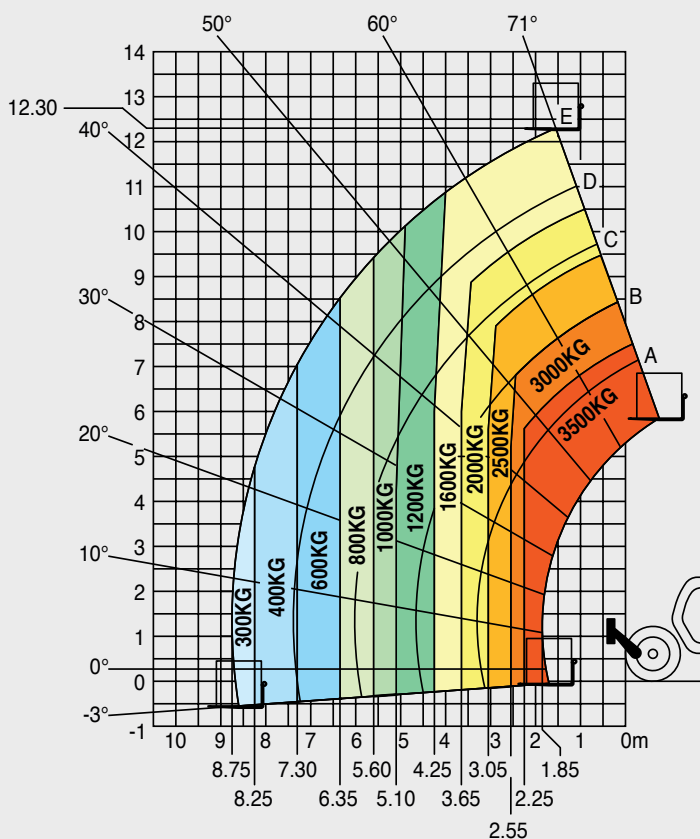


Machine on stabilizers with forks

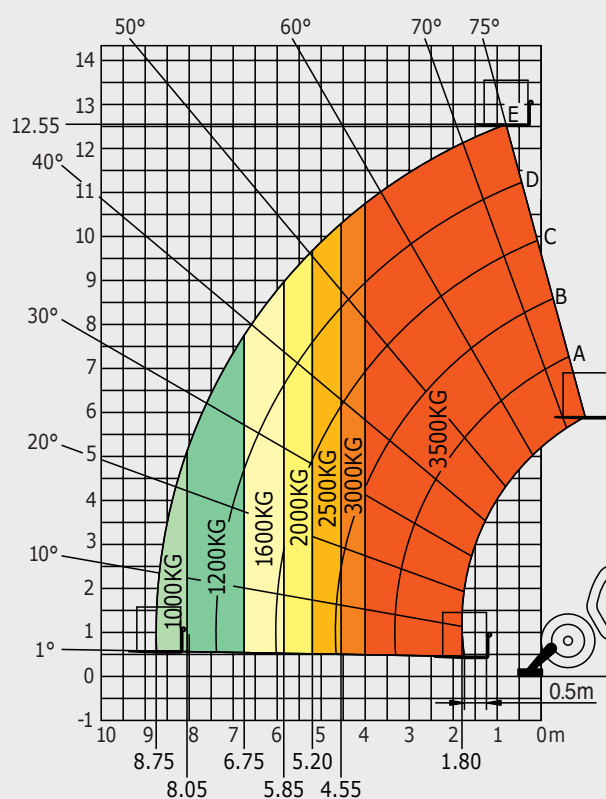

Machine on stabilizers with platform

(MT 1335 HA version)

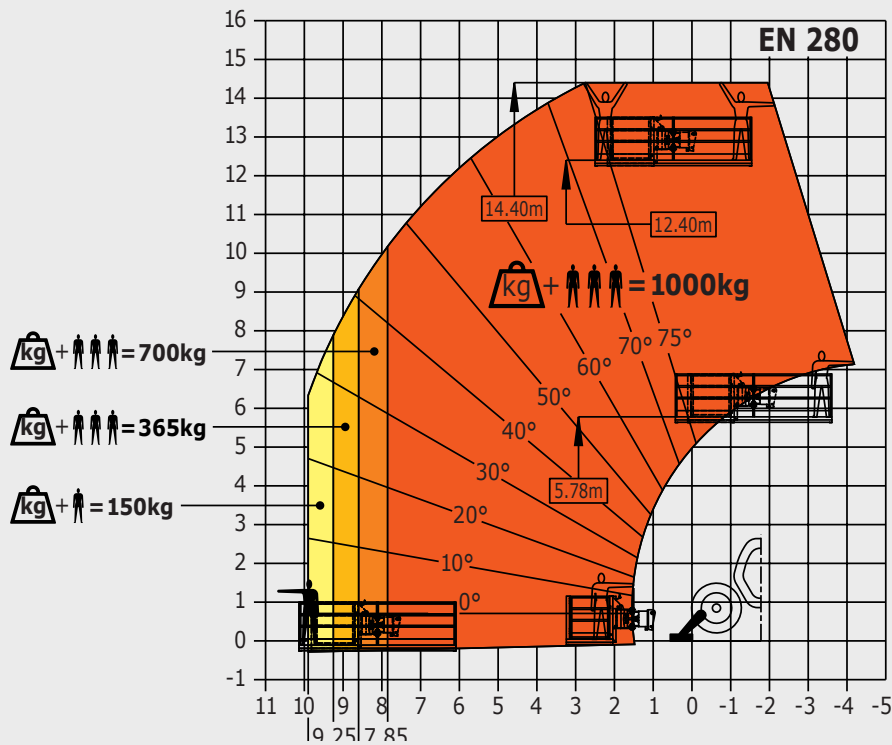

This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes



Your nearest **MANITOU** dealer:



Head office:
B.P. 249 - 430 rue de l'Aubinière - 44158 Ancenis Cedex - France
Tel: 00 33 (0)2 40 09 10 11 - Fax: 00 33 (0)2 40 09 10 97
www.manitou.com